

AICA

AICA SPC

FLOOR

SPC FLOORING

6MM

Thickness

with

1.5MM

IXPE Foam



PT. Techno Wood Indonesia
Kawasan Industri Indotaisei
Sector 1A, Blok K 5A-B,
Kota Bukit Indah Kalihurip, Cikampek,
Karawang, Jawa Barat 41373

Distributor
PT. Marga Bharata
Jl. Pangeran Jayakarta, No. 101/A2,
Mangga Dua Selatan, Sawah Besar,
Jakarta Pusat, 10730

☎ 0812 2625 9259

✉ marketing@technowood.co.id

🌐 technowood.indonesia

🌐 technowoodindonesia-aica.co.id


6MM



SPCK 33019 | Dark Sienna



SPCK 8081 | Warm Beech

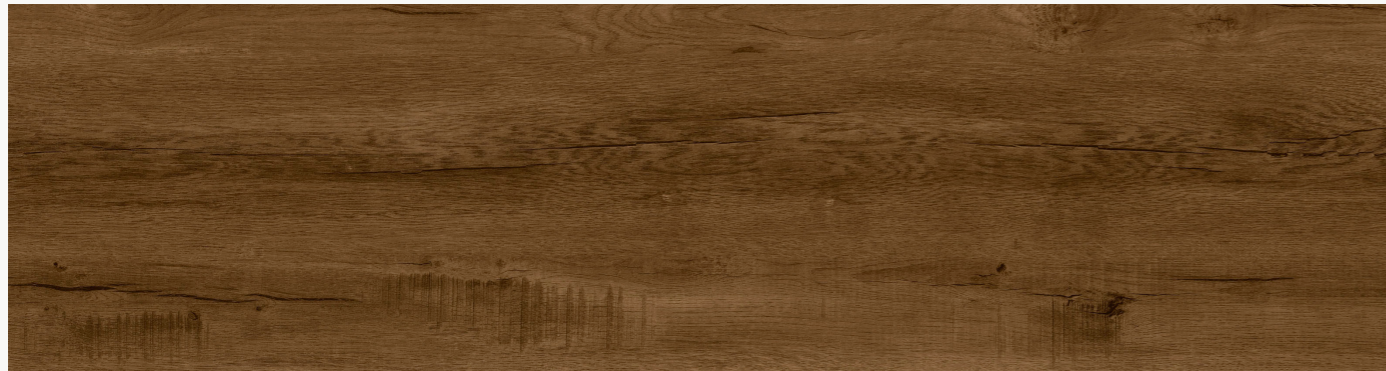

SPCK 8056 | Harvest Brown




SPCK 10381 | Soft Hazel




SPCT 117 | Lancelot Oak

AICA SPC FLOOR SPECIFICATION

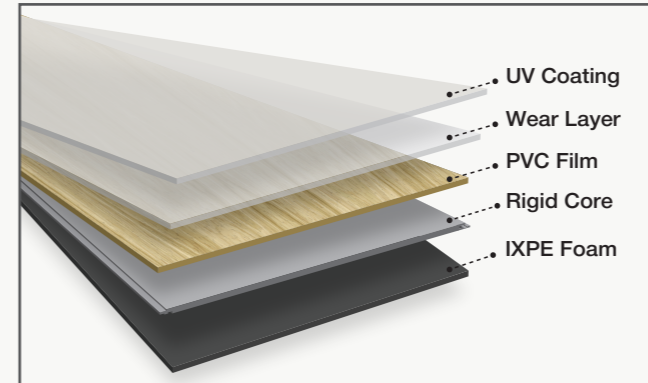

Size	: 1,220 mm x 184 mm
SPC Thickness	: 6.0 mm
IXPE Foam	: 1.5 mm
Wear Layer	: 0.3 mm
10 Plank/Box	: 2.24 sqm
Weight/Box	: 22 Kg
Application	: Click-Fit System

LAYOUT RECOMMENDATION

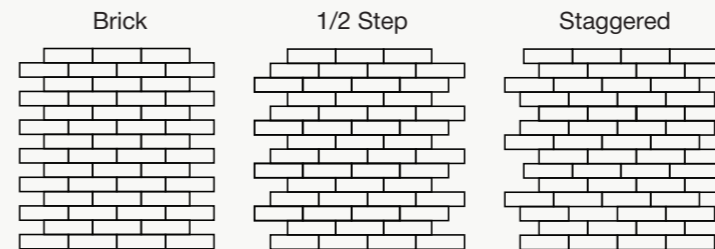

Built in with 1.5 mm IXPE Foam

TECHNICAL DATA



TESTING ITEM	TESTING STANDARD	RESULT
Overall thickness	ASTM F3261-20, ASTM F387-17 (Reapproved 2022)	PASSED
Thickness of wear layer	ASTM F3261-20, ASTM F410-08 (Reapproved 2022)	PASSED
Residual indentation	ASTM F3261-20, ASTM F1914-18 (Reapproved 2023)	PASSED
Dimensional stability after exposure to heat	ASTM F3261-20, ISO 23999:2021 (E)	PASSED
Resistance to chemicals	ASTM F3261-20, ASTM F925-13 (Reapproved 2020)	PASSED
Abrasion resistance	REFER TO: EN 13329	PASSED
Peel resistance (180°)	ISO 24345-2006(E)	PASSED
Tensile strength	ISO 10582	PASSED
Slip resistance	EN 13893 is selected (DIN 51130 was replaced by DIN EN 16165)	PASSED

- Easy Installation
- Click-Fit System
- UV Coated
- Termite Free
- Wear Resistant
- Easy Maintenance